

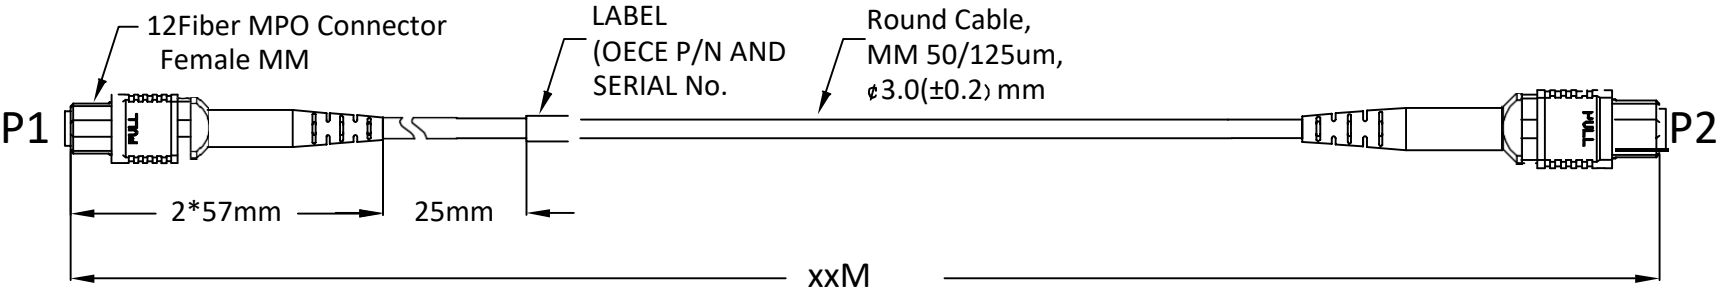


| REV | PN                   | DATE       |
|-----|----------------------|------------|
| 1   | C-MPO-MPO-OM3-8F-xxM | 2023.09.20 |

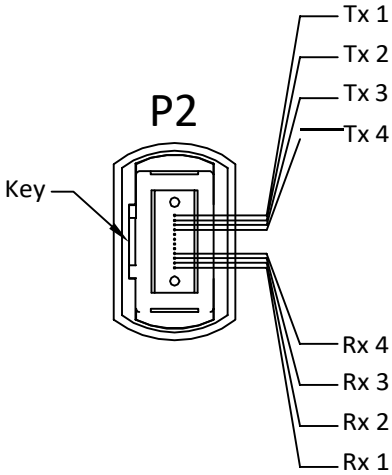

| P1<br>ROW Fiber | CABLE<br>Buffer Color | P2<br>ROW Fiber |
|-----------------|-----------------------|-----------------|
| Rx 1            | Blue                  | Tx 1            |
| Rx 1            | Orange                | Tx 2            |
| Rx 1            | Green                 | Tx 3            |
| Rx 1            | Brown                 | Tx 4            |
| UNUSED          | UNUSED                | UNUSED          |
| UNUSED          | UNUSED                | UNUSED          |
| UNUSED          | UNUSED                | UNUSED          |
| UNUSED          | UNUSED                | UNUSED          |
| Tx 4            | Yellow                | Rx 4            |
| Tx 3            | Violet                | Rx 3            |
| Tx 2            | Rose                  | Rx 2            |
| Tx 1            | Aqua                  | Rx 1            |

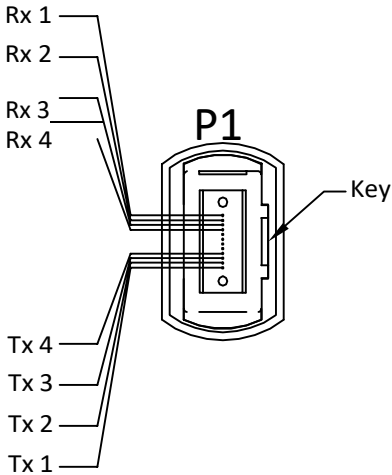

- Notes:**
1. Insertion Loss:  
MPO < 0.7dB (standard Loss);  
MPO < 0.3dB (Low Loss);  
Return Loss: 20dB Min
  2. CABLE Quality Assurance System ..  
\* Test Specifications for Bellcore GR-409-core  
\* Smoke density Purpose IEC-61034  
\* Halogen Acid Content IEC-754-1  
\* Flame Resistance IEC 60332-1, IEC 60332-3  
\* Conform to WEEE RoHS standard.

3. Mechanical Specifications:  
Maximum Tensile Load : 250N  
\* Minimum Band Radius : 30mm
4. Storage, installation, operations temperature: -20~+60℃

| QSFP OPTICAL CABLE<br>ASSEMBLIES NUMBER |                      |  | CABLE<br>TYPE | CABLE<br>DIA.(mm) |  |
|-----------------------------------------|----------------------|--|---------------|-------------------|--|
|                                         | <b>Optiset</b>       |  |               |                   |  |
|                                         | C-MPO-MPO-OM3-8F-xxM |  | OM3           | 3.0 ± 0.2         |  |
|                                         |                      |  |               |                   |  |
|                                         |                      |  |               |                   |  |

" xx ":Cable Overall Length (m)

|       |   |                                   |
|-------|---|-----------------------------------|
| REV.  | 1 |                                   |
| SCALE | — |                                   |
|       |   | <b>MPO-MPO crossover assembly</b> |
|       |   |                                   |